

A DAWSON DOOR PRODUCT:

# ULTRA NARROW STILE SERIES

CUSTOM CRAFTED OPTIONS & TECHNICAL SPECIFICATIONS

A PREMIER AMERICAN METAL FABRICATOR SINCE 1946




# DAWSON

DOOR PRODUCT /

## ULTRA NARROW STILE SERIES

Ultra Narrow Stile Doors, as appealing as the All Glass Doors, incorporate a very narrow vertical sightline, adding to the sophisticated glass door look. Doors are factory glazed with monolithic or laminated tempered glass. The aluminum stiles are clad with stainless steel or bronze and finished to match the top and bottom rails. This construction is available in either balanced or with standard center pivoted hardware. Each project is custom engineered to meet even the most demanding design specifications.

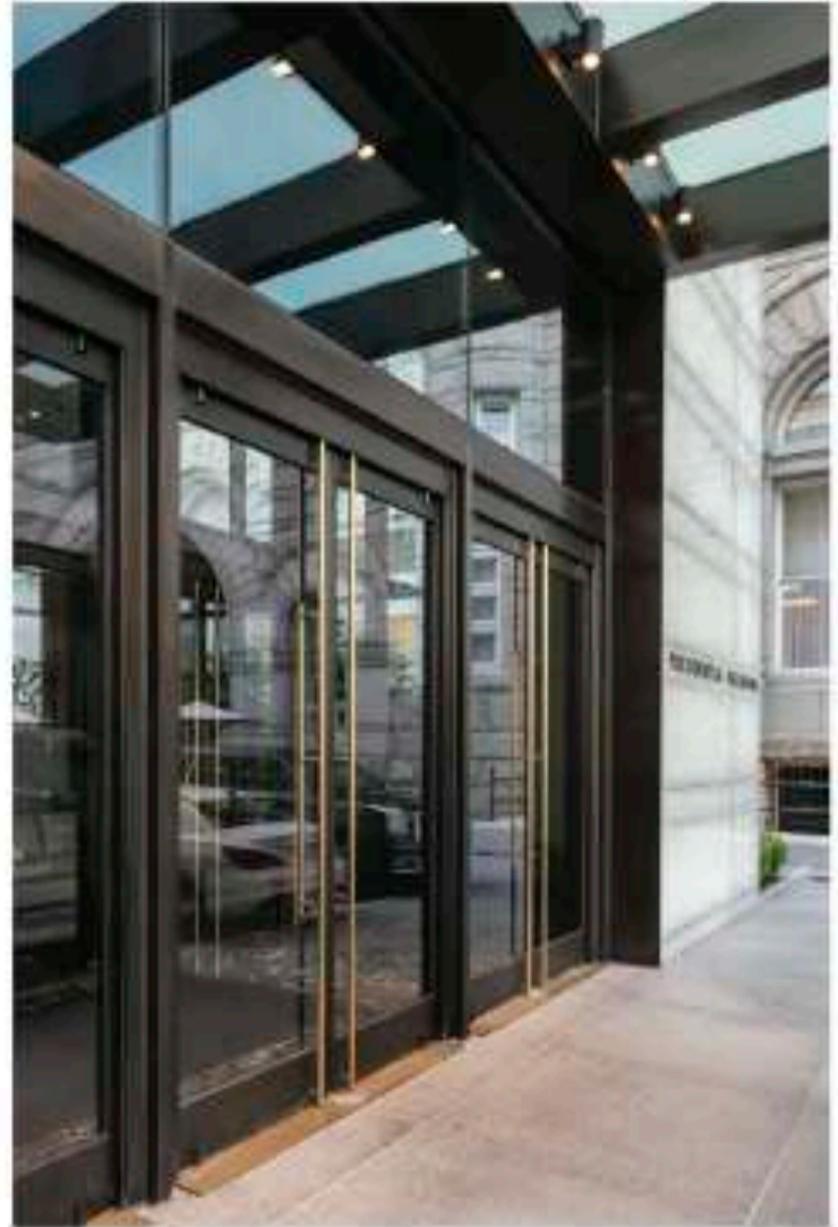

International Hotel - Presidential Ballroom, Washington, D.C., United States

## KEY FEATURES

Discover the product features and technical specifications below to see if the Ultra Narrow Stile Series is the right fit for your next project.



### CUSTOM OPTIONS

Choose between a Balanced or Center Hung configuration as well as material and finish options.



### BEST-IN-CLASS DESIGN

Strong, durable and corrosion-resistant materials provide structural integrity while protecting against all conditions.



### 10 YEAR WARRANTY


Dawson stands by its quality engineered products and advanced manufacturing processes, offering ten years of warranty on standard sizes.

## TECHNICAL SPECIFICATIONS


Thickness	2 - 1/8" (clad) / 2" painted
Width	4'-0" max.*
Height	10'-0" max.*
Glass / Glazing	1/2" clear tempered glass (standard); all doors are factory glazed
Stiles	1 - 1/8" (clad) / 1" painted + integrated weather-strips
Top Rail	4 - 1/2" height min.
Bottom Rail	6" height min.
Balanced Frame Face Dimension	3" min.
Balanced Frame Depth	6" min.
Threshold Material	Stainless Steel, Bronze, or Aluminum
Threshold Width	6"

\*consult factory for alternatives


## HEADER / TOP RAIL

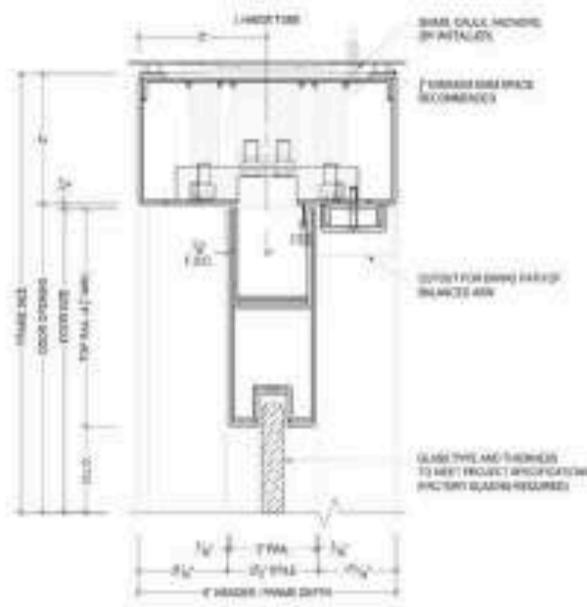

## BOTTOM RAIL

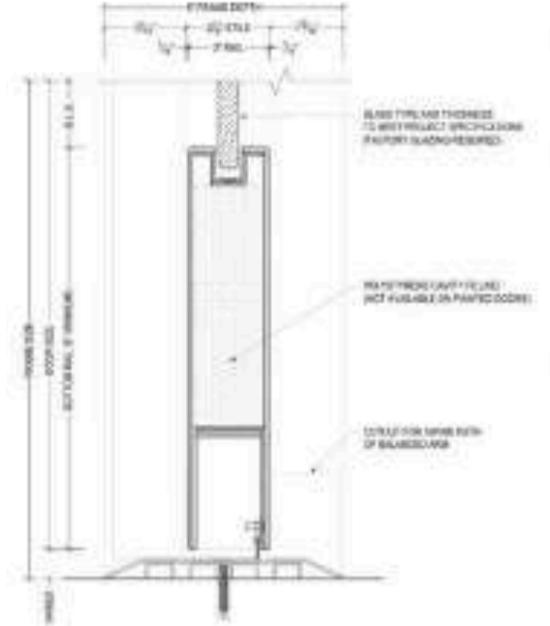

## MEETING STILES

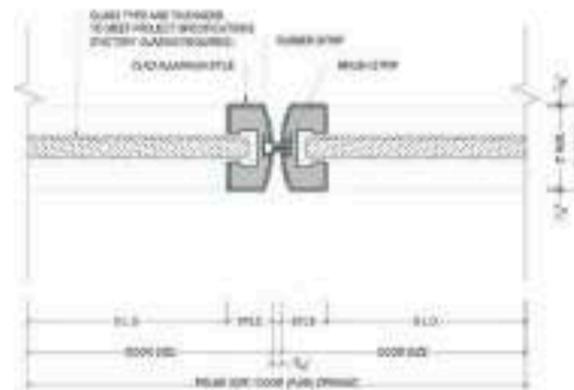

## ADDITIONAL INFORMATION



Accepts several glass thicknesses: 1/2" or 3/4" monolithic and 9/16" or 11/16" laminated (1" insulated coming soon).



Integration of tubular type exit devices or full height push / pulls.



Compatibility for locking mechanisms: magnetic locks, electric strikes and bottom rail locking.



Easy integration with most automatic operators.

## AVAILABLE FINISHES

### BRASS

No. 8 Mirror Polished



No. 6 Satin



No. 4 Satin



Non Directional (Angel Hair)



### STAINLESS

No. 8 Mirror Polished



No. 6 Satin




No. 4 Satin



Non Directional (Angel Hair)



Glass Bead



### PAINTED


Kynar



Powder Coating



# FEATURED PROJECTS

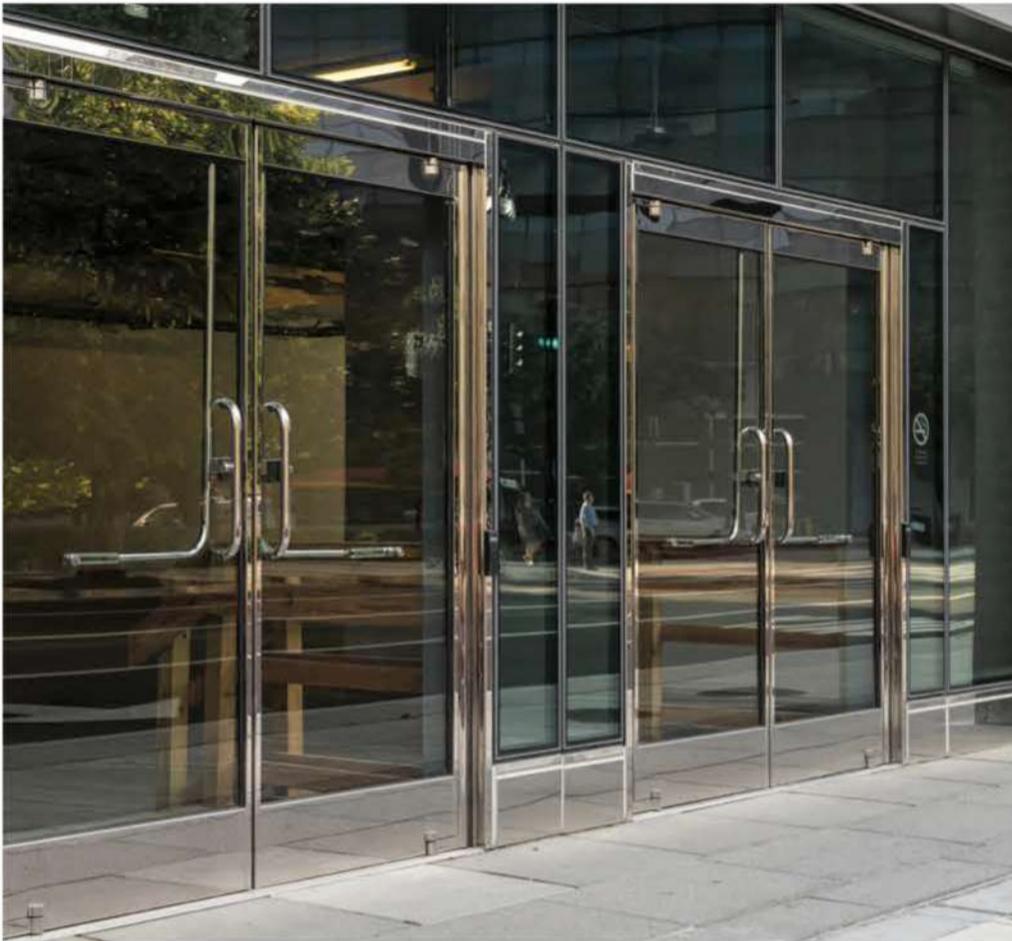

Capitol Crossing, Washington, D.C., United States



1000 Connecticut Avenue, Washington, D.C., United States



The New York Times Building, New York City, NY, United States



National Museum of African American History & Culture, Washington, D.C., United States

**Installation-Repair-Service**  
Specializing from the Conceptual Design

**1-800-371-2208**

**New York & New Jersey Premier Door Company**

